ecosmart⁺
Fire

# POP Series

# POP Series Design features

ecosmart⁺ Fire

## Included Accessories



**Jerry Can with Safety Spout & e-NRG bottle adaptor**



**Lighting Rod & Lighter**



**Jerry Can Spout Extension**



**AB8 Efficiency Ring (AB8 models only)**

## Optional Accessories



**Outdoor Covers**

### 1. Surround Colours
Available in eye-catching orange, yellow, black or white, or request costing for a custom colour (MTO) to suit your personal design style, architectural environment and decor.

### Configurations
Available in 4 different heights and two different burner sizes.

### Enjoy Indoors & Outdoors
The tray holding the EcoSmart burner has a special plug, which is inserted for use indoors, or removed for outdoor use.

### 2. Glass Screen Included
The glass screens stabilise the flame in windy conditions and provide an added layer of safety, peace of mind and comfort.

### Quick and Easy Installation
With no installation or building works required, simply unpack, put into position, and off you go.

### Portable Fireplace
Fully portable, you can move the fireplace between rooms and outdoor spaces, or store away when not needed.

### Ground Fixing Brackets
Models come with fixing brackets for permanently locating into a fixed position.

### 3. Burner Colours
Available with a Stainless Steel or Black Burner.

### Environmentally-Friendly
Bioethanol fireplaces use an environmentally-friendly, renewable energy source that burns clean and delivers warming heat. You and your guests will enjoy the ambiance and tranquility of a real fire, without the hassles of burning real wood - no more embers, ash, and soot to clean up.

### Global Compliance
These models comply with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

*Logs not included*
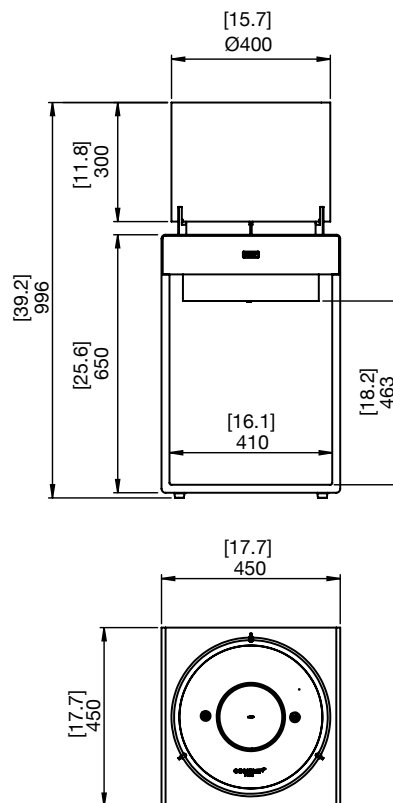
# POP 8T Specifications

## The tallest of the POP Series, POP 8T is a perfect statement fire for indoor or outdoor settings. Its chic form and array of eye-catching colours provide a big, vibrant impact.

### Ventilation and Efficiency*

| Model Dimensions L x W x H mm/in | Compatible Burner | Fuel Capacity | Heats on Average (Indoors) | Thermal Output Net (MAX per burner) | Approx. Burn Time | Minimum Room Size |
|---|---|---|---|---|---|---|
| 450 x 450 x 996 17.7 x 17.7 x 39.2 | AB8 | 8 L [2.1 Gals] | Over 60 m² [645 ft²] | 21.56 MJ/h 20,433 BTU/h, 5.99 kW | 7 - 9 hours | 116 m³ [4,096 ft³] |
| | | | Over 30 m² [322.9 ft²] | 13.9 MJ/h 12,860 BTU/h, 3.77 kW | 9 - 11 hours | |

With Efficiency Ring** (EN Compliant)

| | |
|---|---|
| Application | Indoor & Outdoor |
| Surround Colours | White ESF.D.POP.8.T.WH — Black ESF.D.POP.8.T.BL — Orange ESF.D.POP.8.T.OR — Yellow ESF.D.POP.8.T.YL |
| Burner Colours | Stainless Steel — Black |
| Materials | Grade 202 Stainless Steel surround with Coloured Powder-coating, Grade 304 Stainless Steel Burner with optional Black Ceramic Coating, Borosilicate Glass Fire Screen |
| Approx. Weight | 27.6kg [60.7lbs] Weight includes burner. |
| Fuel Type | e-NRG Bioethanol / **e-NRG.com** |

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position.

This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant. **To comply with EN 16647 the included AB8 Burner Efficiency Ring must be installed before operating indoors.

[15.7] Ø400
[11.8] 300
[39.2] 996
[25.6] 650
[16.1] 410
[18.2] 463
[17.7] 450
[17.7] 450

**FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL**
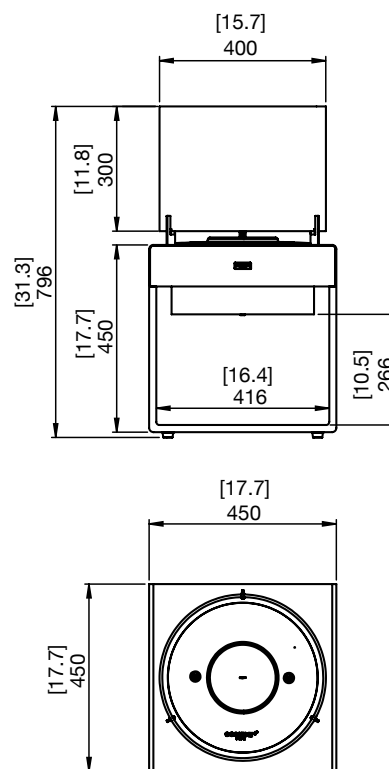
# POP 8L Specifications

## A low-set modern retro style piece of fire furniture, the POP 8L is a combination of contemporary influences and nostalgic design elements.

### Ventilation and Efficiency*

| Model Dimensions L x W x H mm/in | Compatible Burner | Fuel Capacity | Heats on Average (Indoors) | Thermal Output Net (MAX per burner) | Approx. Burn Time | Minimum Room Size |
|---|---|---|---|---|---|---|
| 450 x 450 x 796 17.7 x 17.7 x 31.3 | AB8 | 8 L [2.1 Gals] | Over 60 m² [645 ft²] | 21.56 MJ/h 20,433 BTU/h, 5.99 kW | 7 - 9 hours | 116 m³ [4,096 ft³] |
| | | | Over 30 m² [322.9 ft²] | 13.9 MJ/h 12,860 BTU/h, 3.77 kW | 9 - 11 hours | |

**With Efficiency Ring** (EN Compliant)**

| | |
|---|---|
| Application | Indoor & Outdoor |
| Surround Colours | White ESF.D.POP.8.L.WH    Black ESF.D.POP.8.L.BL <br> Orange ESF.D.POP.8.L.OR    Yellow ESF.D.POP.8.L.YL |
| Burner Colours | Stainless Steel    Black |
| Materials | Grade 202 Stainless Steel surround with Coloured Powder-coating, Grade 304 Stainless Steel Burner with optional Black Ceramic Coating, Borosilicate Glass Fire Screen |
| Approx. Weight | 25.1kg [55.2lbs] Weight includes burner. |
| Fuel Type | e-NRG Bioethanol / **e-NRG.com** |

[15.7] 400
[11.8] 300
[31.3] 796
[17.7] 450
[16.4] 416
[10.5] 266
[17.7] 450
[17.7] 450

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position.

This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant. **To comply with EN 16647 the included AB8 Burner Efficiency Ring must be installed before operating indoors.

**FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL**

# Freestanding Designer Fireplace
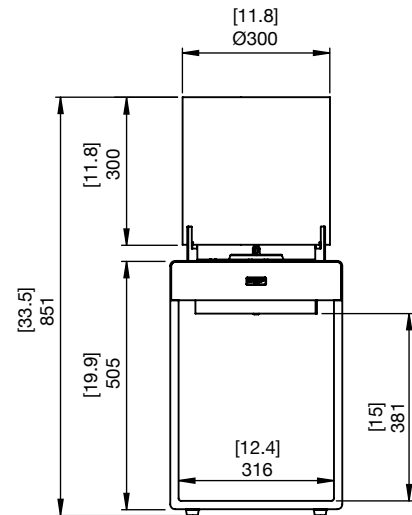
ecosmart⁺ Fire

# POP 3T Specifications

## An eclectic taller-style portable fire that's full of character, the POP 3T combines modern retro accents with contemporary technology.

### Ventilation and Efficiency*

| Model Dimensions L x W x H mm/in | Compatible Burner | Fuel Capacity | Heats on Average (Indoors) | Thermal Output Net (MAX per burner) | Approx. Burn Time | Minimum Room Size |
|---|---|---|---|---|---|---|
| 350 x 350 x 851 13.8 x 13.8 x 33.5 | AB3 | 2.5 L [0.7 Gals] | Over 20 m² [215 ft²] | 6.14 MJ/h 5,800 BTU/h 1.7 kW | 8 - 11 hours | 40 m³ [1,413 ft³] |

| | |
|---|---|
| Application | Indoor & Outdoor |
| Surround Colours | ⬤ White ESF.D.POP3.T.WH   ⬤ Black ESF.D.POP.3.T.BL   ⬤ Orange ESF.D.POP.3.T.OR   ⬤ Yellow ESF.D.POP.3.T.YL |
| Burner Colours | ⬤ Stainless Steel   ⬤ Black |
| Materials | Grade 202 Stainless Steel surround with Coloured Powder-coating, Grade 304 Stainless Steel Burner with optional Black Ceramic Coating, Borosilicate Glass Fire Screen |
| Approx. Weight | 16.2kg [35.6lbs] Weight includes burner. |
| Fuel Type | e-NRG Bioethanol / e-NRG.com |

[11.8] Ø300

[11.8] 300

[33.5] 851

[19.9] 505

[15] 381

[12.4] 316

[13.8] 350

[13.8] 350

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position.

This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

**FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL**
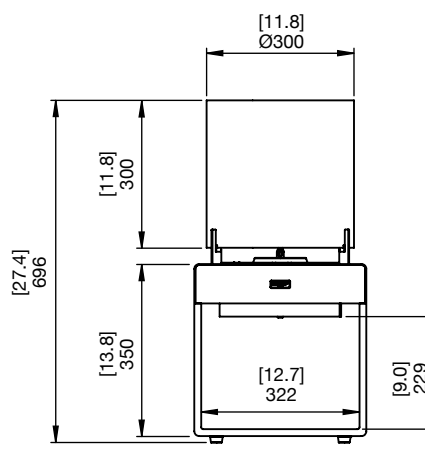
# POP 3L
# Specifications

## Combining chic style and robust construction, the POP 3L is a perfect smaller fire where space is at a premium, whether indoors or out.

### Ventilation and Efficiency*

| Model Dimensions L x W x H mm/in | Compatible Burner | Fuel Capacity | Heats on Average (Indoors) | Thermal Output Net (MAX per burner) | Approx. Burn Time | Minimum Room Size |
|---|---|---|---|---|---|---|
| 350 x 350 x 696 13.8 x 13.8 x 27.4 | AB3 | 2.5 L [0.7 Gals] | Over 20 m² [215 ft²] | 6.14 MJ/h 5,800 BTU/h 1.7 kW | 8 - 11 hours | 40 m³ [1,413 ft³] |

| | |
|---|---|
| Application | Indoor & Outdoor |
| Surround Colours | ⚪ White ESF.D.POP3.L.WH ⚫ Black ESF.D.POP.3.L.BL 🟠 Orange ESF.D.POP.3.L.OR 🟡 Yellow ESF.D.POP.3.L.YL |
| Burner Colours | ⚪ Stainless Steel ⚫ Black |
| Materials | Grade 202 Stainless Steel surround with Coloured Powder-coating, Grade 304 Stainless Steel Burner with optional Black Ceramic Coating, Borosilicate Glass Fire Screen |
| Approx. Weight | 15.7kg [34.5lbs] Weight includes burner. |
| Fuel Type | e-NRG Bioethanol / **e-NRG.com** |

[11.8] Ø300
[11.8] 300
[27.4] 696
[13.8] 350
[12.7] 322
[9.0] 229

[13.8] 350

[13.8] 350

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position.

This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

**FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL**